

Model LBS Miniature Compression Load Button

Why the Interface model LBS Miniature Compression Load Button is the best in class:


- Temperature compensated
- Integral load button
- Small diameter
- From .12" height
- Environmentally sealed



ACCESSORIES*

Instrumentation

*Please call for additional information

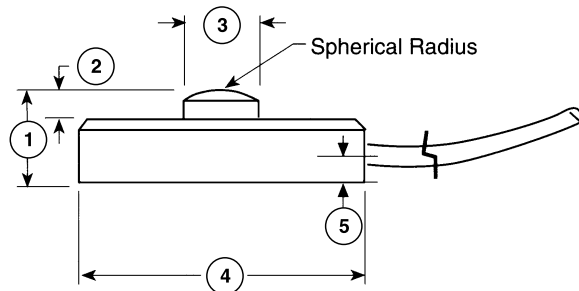

SPECIFICATIONS

ACCURACY – (MAX ERROR)

Nonlinearity-% FS± 0.25
 Hysteresis-% FS± 0.25
 Nonrepeatability-% RO± 0.10

TEMPERATURE

Compensated Range-°F-60 to 160
 Compensated Range-°C-15 to 71
 Operating Range-°F-65 to 225
 Operating Range-°C-54 to 107
 Effect on Zero-% RO/°F – MAX± 0.005
 Zero Balance % FS±2

ELECTRICAL

Rated Output-mV/V (Nominal)2.0
 Bridge Resistance-Ohm (Nominal)350
 Excitation Voltage.....5 VDC
 Excitation Voltage – MAX.....7 VDC

MECHANICAL

CalibrationComp.
 Deflection0.001-0.003
 Safe Overload-% CAP150
 Ultimate Overload % of CAP300
 Cable length-ft......5
 4-conductor Teflon insulated cable with temperature compensation board

DIMENSIONS

See Drawing	CAPACITY (lbf)					
	LBS Series					
	5, 10, 25, 50		100, 250		500, 1K	
	inch	mm	inch	mm	inch	mm
①	0.12	3.00	0.15	3.80	0.25	6.4
②	0.03	0.80	0.02	0.50	0.03	0.80
③	0.09	2.20	0.12	3.00	0.24	6.10
④	0.38	9.60	0.50	13.0	0.75	19.0
⑤	.04	1.0	.06	1.5	.10	2.5